


# RM J110X

## DEPENDABLE PERFORMANCE

- **Extra wide discharge conveyor**  
Lowers hydraulically  
Easy to remove

- **Easy Setup on The Job**  
The feed hopper walls fold & lock hydraulically from the ground.

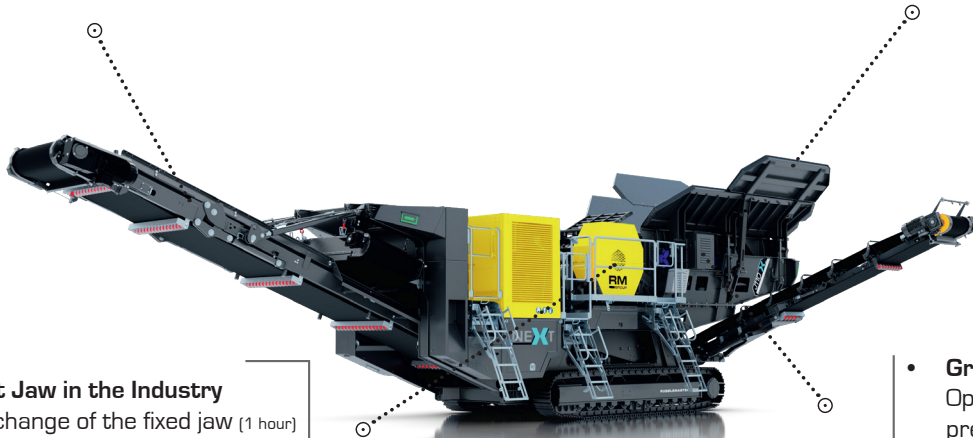

- **The Heaviest Jaw in the Industry**  
Easy & safe change of the fixed jaw (1 hour)  
Hydraulic overload protection  
Jaw level sensor  
Reverse crushing capability

- **Grizzly Feeder**  
Optional active 2-deck pre-screen to maximize scalping action.



### The Heaviest Jaw Crusher in Its Class

The heart of the machine comes with extra strength and ingenuity to keep you crushing in the toughest of applications



### Trust Your Guys Around The Machine.

Fully radio remote operated and with maximum clarity about the condition of the machine you can rest assured that your guys got it covered



### A New Experience Operating a Mobile Crusher

We make the most robust mobile jaw crusher available. Settings and maintenance are easy so that you can put any operator on our machine with confidence.



### Lowest Operating Costs Through Latest Hydraulic Technologies

It consumes less hydraulic fluid, requires fewer change intervals, and is therefore more cost-efficient to maintain.

# RM J110X

## DEPENDABLE PERFORMANCE

<b>CAPACITY</b>	up to 496 US tph (depending on material)
<b>FEED SIZE</b>	up to an edge length of 23"   600 mm
<b>CRUSHER UNIT</b>	Single toggle jaw crusher, hydraulic drive Inlet opening, 43" x 27"   1,100 x 700 mm CSS range: 1¾" – 7"   45 – 175 mm Hydraulic overload protection
<b>FEED UNIT</b>	Self-locking hydraulic folding hopper walls Standard capacity: 8 yd <sup>3</sup>   6.15 m <sup>3</sup> Extended capacity: 15½ yd <sup>3</sup>   12 m <sup>3</sup>
<b>GRIZZLY SECTION</b>	6' 6" x 3' 6"   2,000 x 1,080 mm Optional fines side conveyor
<b>POWER UNIT</b>	CAT C9.3B 375 HP   280 kW TIER 4F
<b>MAIN DISCHARGE CONVEYOR</b>	Width 47¼"   1,200 mm Discharge height 12' 9"   3,900 mm
<b>TRANSPORT DIMENSIONS</b> [L X W X H]	48'3" x 9'5" x 11'2" 14.7 m x 2.85 m x 3.4 m
<b>WEIGHT</b> (NO OPTIONS)	114,640 lbs   52,000 kg



Dust suppression system



Magnet



Radio remote control



RM XSMART Telemetry



Folding Hopper Walls

